



Variables in Waitfor node (Time)

Chu.chang 2018.1.12 V1.0
Translated by Edward

Description


➤ Purpose

for more flexible in Waitfor node




➤ Equipment

1. TM5

➤ Function operation

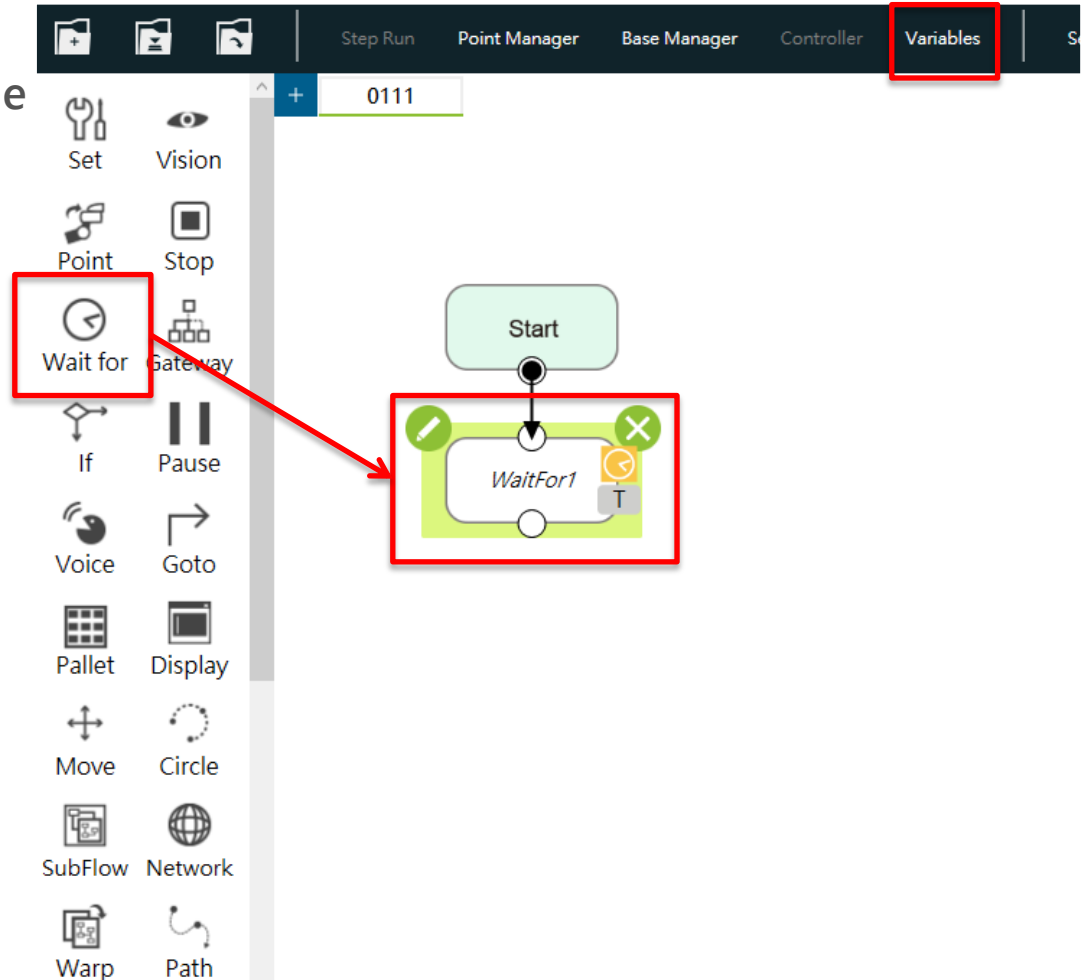


Function operation

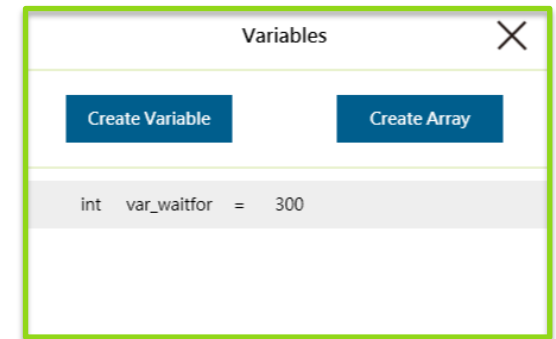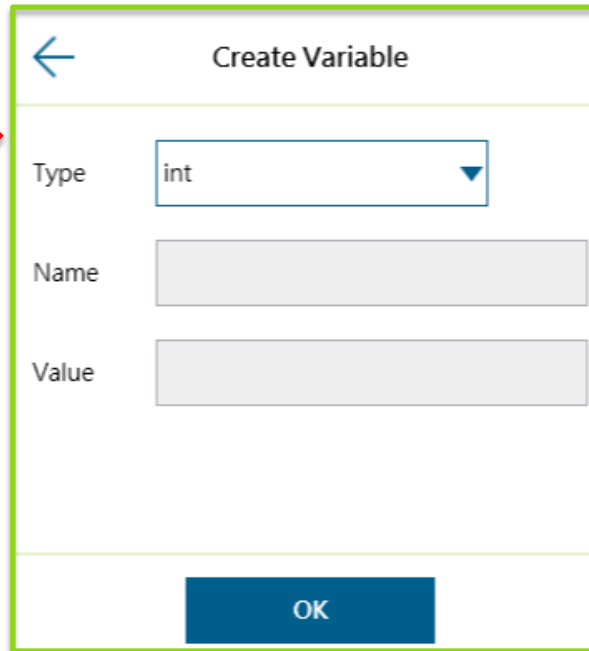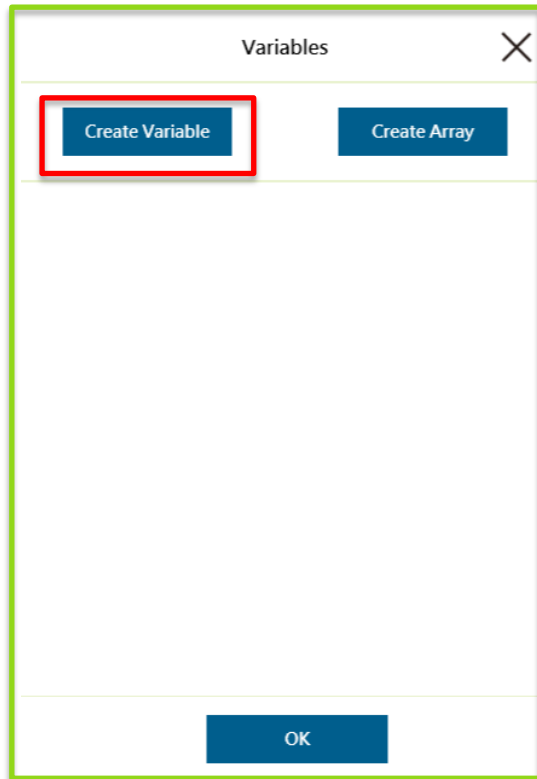

Setting completed

Create a new variable

Function operation

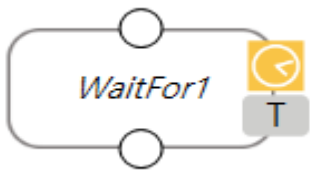

WaitFor [Close]

Node Name: WaitFor1

All One

Digital I/O: DIO(0) >

Time: Time(var_wait_time ms) >

Variables: Variables(0) >

Analog I/O: AIO(0) >

Compliance: Compliance(0) >

OK Delete this node

Time Setting [Back]

Time

Wait Time: ms

ms

ms

OK

Choose variable

END